

## **ADDENDUM NO. 2**

### **MAIN AND PIKE STREET RECONSTRUCTION**

Laura, Ohio

AUGUST 18, 2009

To: Planholders



From: Mote & Associates, Inc.  
214 West Fourth Street  
Greenville, Ohio 45331  
Phone: (937) 548-7511  
Fax: (937) 548-7484  
E-mail: [info@moteassociates.com](mailto:info@moteassociates.com)

Re: Main and Pike Street Reconstruction Project

This addendum forms a part of the Contract Documents and modifies the original Contract Documents dated July 2009. Acknowledge receipt of this Addendum in space provided on the Bid Proposal form. Failure to do so may subject the Bidder to disqualification.


1. A 'Typical Drive Detail' and 'Concrete Sidewalk Detail' were omitted from the plans. There is an attachment for each detail included with this addendum. Please note that the contractor shall be responsible for the preparation of an adequate compacted base for the drive approaches and sidewalk. Typically, an average of 4"-6" of item 304 aggregate base will be needed to provide an adequate base. All costs associated with the completion of a compacted aggregate base for items 452 and 608 shall be included with the bid for each respective item.
2. The cost of the 6" of aggregate base detailed under the proposed curb and gutter on sheet 3 shall be included with the bid for the curb and gutter (item 609). That aggregate base quantity (under the curb and gutter) has not been included in the quantity for item 304 indicated on the plans and on the proposal form.
3. This addendum will be posted on our website. Please see the following link: <http://www.moteassociates.com/projects.htm>.

END OF ADDENDUM

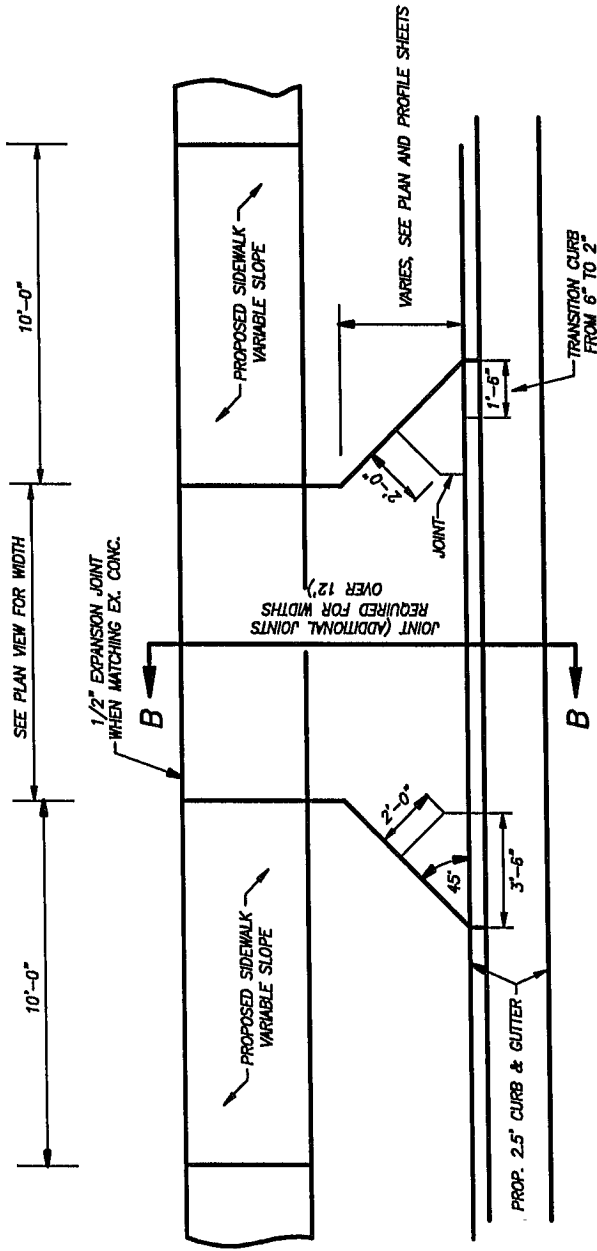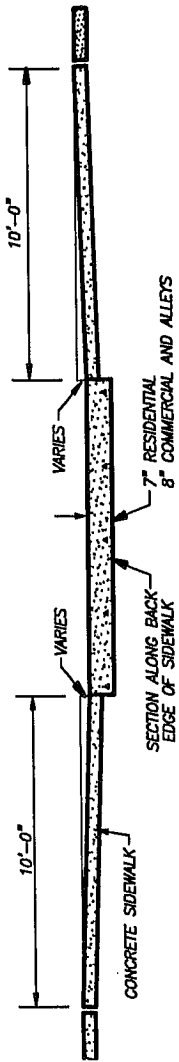


**TYPICAL DRIVE DETAIL**

NO SCALE

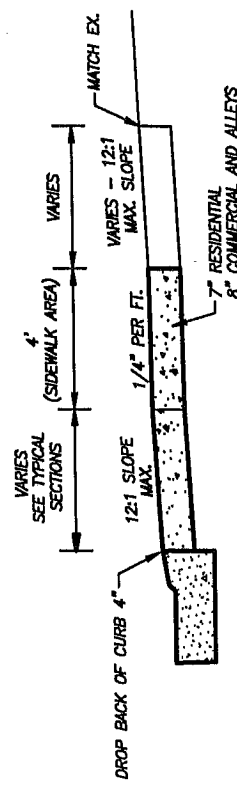

**SECTION B-B**

NO SCALE

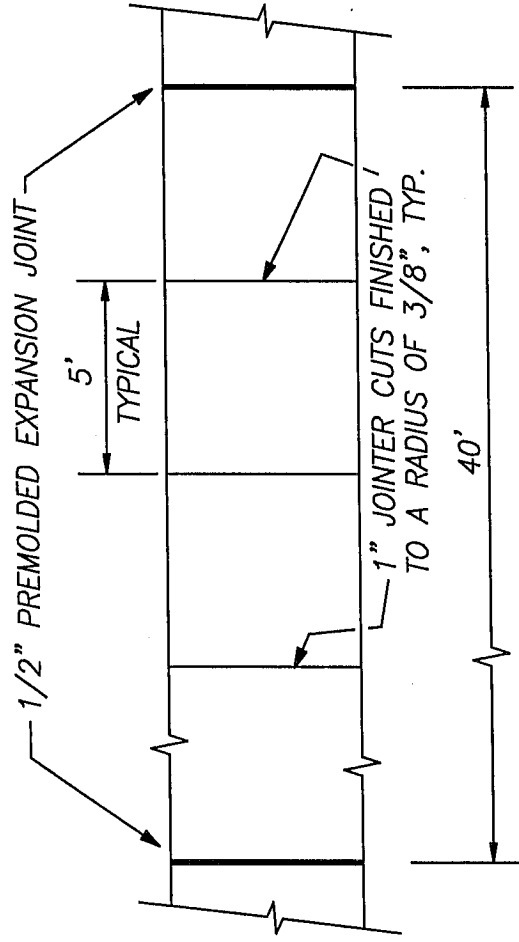

**NOTES:**

1. PROVIDE BROOM FINISH TO ALL EXPOSED SURFACES.
2. CONCRETE SHALL CONFORM TO ITEMS 499 AND 511
3. PROVIDE A MINIMUM OF 2" EDGING AROUND ALL EXPOSED SURFACES.

**CONCRETE SIDEWALK DETAIL**

NO SCALE